





## Theilo Stahl Bohrfix - verschraubt Holz und Stahl

Abmessung $\varnothing d \times L$ [mm]	Gewindelänge $l_g$ [mm]	Kopfdurchmesser $\varnothing d_k$ [mm]	Antrieb	Klemmstärke <sup>a)</sup>	Bohrleistung [mm]
Edelstahl gehärtet					
4,8 x 38	22	9,5	TX25●	20	4
5,5 x 45	26,5	10,8	TX30●	25	5
5,5 x 50	32	10,8	TX30●	30	5
6,3 x 60	31	12,4	TX30●	35	6
6,3 x 70	41	12,4	TX30●	45	6
6,3 x 80	41	12,4	TX30●	55	6
6,3 x 85	46	12,4	TX30●	60	6
6,3 x 110	46	12,4	TX30●	85	6

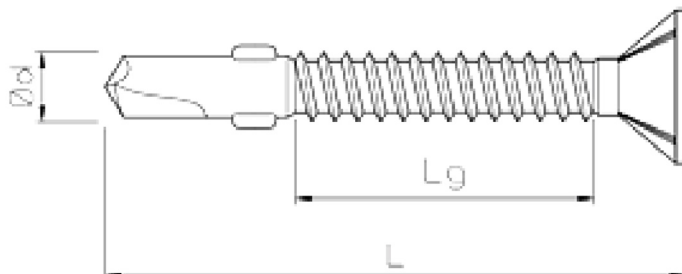

Seitenansicht



Draufsicht